

What's in the Box?

PART NO.	QTY	DESCRIPTION
HDS-2PS	1	HDMI 2-Port Splitter
Power Supply	1	PS5VDC2A
User Manual	1	

Technical Specifications

VIDEO	
Format	HDMI 1.3c [Deep Color, xvYcc color space supported]
HDMI Compliance	HDMI 1.1
HDCP Compliance	Yes
Video Bandwidth	Single-link 225MHz [6.75Gbps]
Resolution	Up to WUXGA [1920x1200 @ 60Hz] & UXGA [1600x1200 @ 60Hz]
Input Interface	(1) HDMI[7.1ch audio & video]
Output Interface	(2) HDMI[7.1ch audio & video]
Connector	Type A [19-pin male]
AUDIO	
Supported Formats	DTS-HD Master Audio, Dolby TrueHD Dolby Digital, DTS, DVD-Audio, LPCM, SACD, MPCM
OTHER	
DDC Signal	5 Volts [peak-to-peak], TTL
TDMS Signal	1.2 Volts[peak-to-peak], TTL
Power	External 5VDC2A
Dimensions	5"W x 1.125"H x 3"D
Weight	0.25 lbs.
Approvals	Device: CE, ROHS Power Supply: C-UL US, CE

© Copyright 2010 Smart-AVI, All Rights Reserved

NOTICE

The information contained in this document is subject to change without notice. Smart-AVI makes no warranty of any kind with regard to this material, including but not limited to, implied warranties of merchantability and fitness for any particular purpose.

Smart-AVI will not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance or use of this material.

No part of this document may be photocopied, reproduced or translated into another language without prior written consent from Smart-AVI.

For more information, visit www.smartavi.com.



Installation Manual

HDS-2P 2-Port HDMI Splitter



Connect One HDMI/HDTV
Component to Two Displays



SmartAVI, Inc. / Twitter: smartavi
2840 N. Naomi Ave. Burbank, CA 91504
Tel: (818) 565-0011 Fax: (818) 565-0020
<http://www.SmartAVI.com>

www.smartavi.com

Introduction

The HDMI Splitter allows set-top boxes, DVD players, HDMI game console, and other HDTV devices with a HDMI output to be connected to two or more HDTV displays.

Supports HDTV's 480i/480p/720i/720p/1080i/1080p & PC's WUXGA/1900x1200 and works with flat panel, plasma screen, projector, switch, splitter, computer video display, HDTV/HDCP, set-top boxes, DTV and DVD.

HDMI can output up to 20 feet from an HDMI device to the HDMI splitter, and then 20 feet from the HDMI splitter to the displays.


Features

- HDMI 1.3c and DVI 1.0 compliant
- HDCP 1.2 compliant
- Wide Frequency Range: 25MHz~225MHz
- Video bandwidth: 6.7GBPS
- Resolution up to 1080p or WUXGA
- Supports CEC (not bypassing)
- Supports Dolby Digital, DTS-HD and Dolby True HD audio
- Easy installation

Applications

- Home Theater Integration
- Restaurants and Bars
- Digital Signage Deployment
- Information Kiosks/Displays
- Film/Recording Studios

Product - Installation Diagram

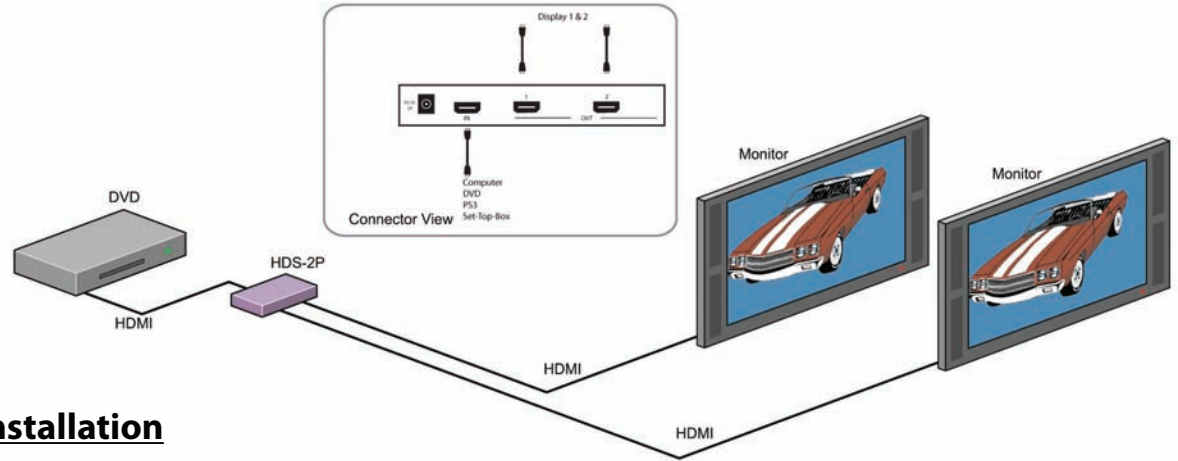

Installation

1. Turn off the HDMI device and the displays.
2. Connect an HDMI cable from the HDMI output device to the input port on the HDS-2P.
3. Connect the displays to the HDMI outputs on the HDS-2P.
4. Connect the power cord to the HDS-2P.
5. Power on the HDMI device and the displays.



HDS-2P Front



HDS-2P Rear