

Installation Manual

HD Home Theater Wall Plate

This home theater wall plate is Designed primarily for one High Definition Multimedia Interface(HDMI) and one component (RCA type) connection

Heavy-Duty 24k Gold plated Connectors are designed to resist corrosion and to provide the best possible connection.


Note:

The wall plate terminals will accomodate only standard HDMI connectors (HDMI Type A) and standard YbPbr (RCA type) Plus analog audio connectors.

Installation:

You can mount this HD video wall plate using a standard single electrical box.

1. Route the cables through the opening in the back of the electrical box
2. Rear HDMI connectors are attached to a short extension cables to prevent wallplate and HDMI cable damage
3. Connect RCA type component and analog audio connectors to the rear side of the wall plate
4. Remove the Face plate from the wall plate by pushing down on HDMI and RCA connectors with your thumbs and at the same time pulling two opposite corners away. Under the face plate you will find two screws hidden there. Place the wall plate against the opening of the electrical box, then thread the two supplied screws through the screw holes in the wall plate and the electrical box, then tighten the screws and reattach the face plate.

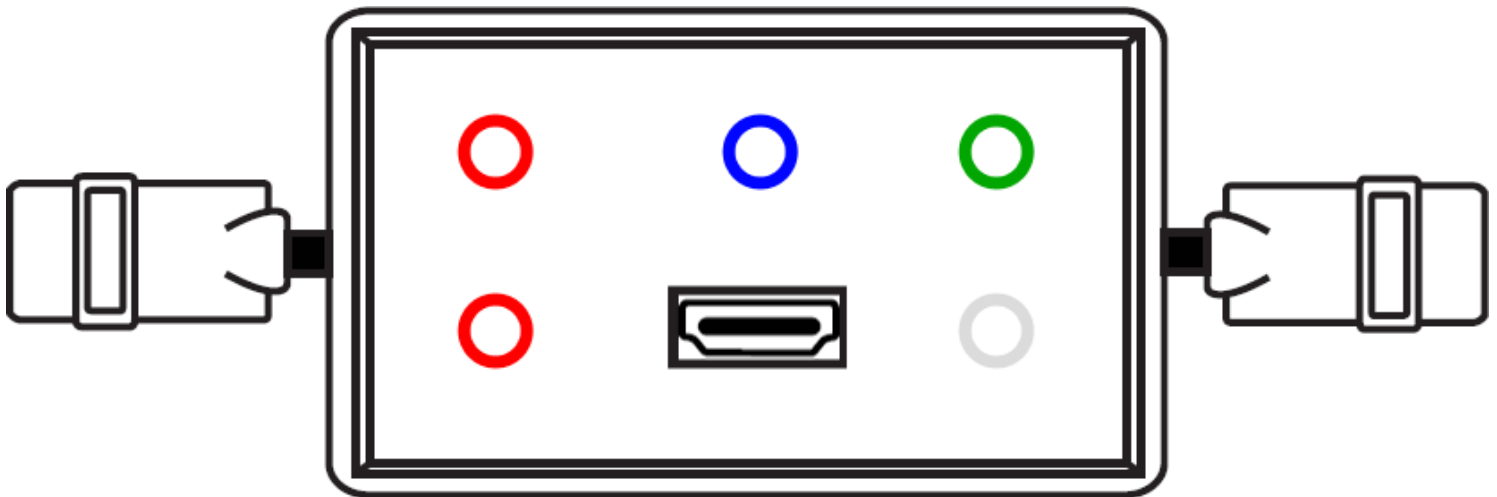

ATLONA
2151 O'toole Ave, Ste D
San Jose CA 95131
Toll Free: 1-877-536-3976
International: 408-954-
8782
FAX: 408-954-8792
Website: www.atlona.com
E-MAIL: info@atlona.com