

DISPLAY


AVAILABLE COLORS



Silver



Black

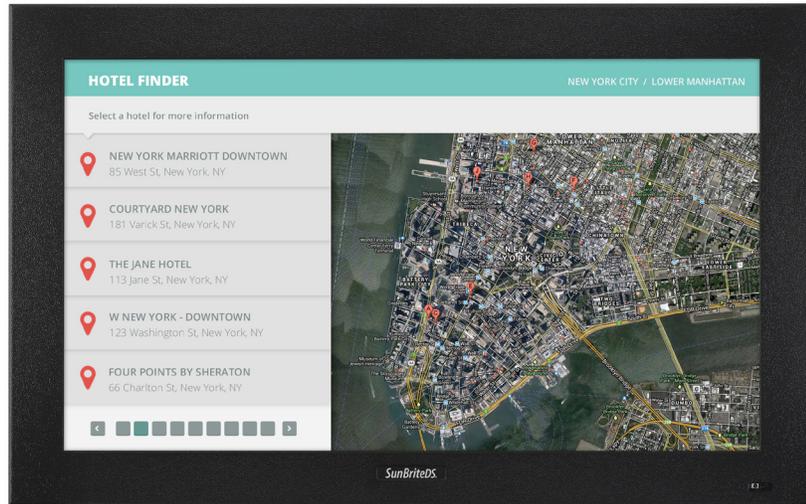

SHOWN IN BLACK

KEY FEATURES

- 32" Pro Series True-Outdoor All-Weather Digital Signage for permanent outdoor installation
- Interactive 3M Microtouch dispersive signal Technology (DST) touch screen made from chemically strengthened glass for improved scratch resistance, with anti-glare surface.
- Bright 32-inch full HD, 1080p LED-LCD screen for improved outdoor viewing
- Direct Sunlight-Readable
- High temperature Enhanced Solar Tolerance (EST) technology prevents isotropic backout
- Exterior designed to protect internal components from rain, snow, dust, insects, humidity, and salt air.
- Powder-coated rust-proof aluminum exterior for strength and durability.
- Multi-fan airflow system keeps the unit cool and dry in temperatures up to 122 degrees F.
- Ability to operate in cold weather (-40 degrees F).
- RS232 serial control with discrete on, off, and input control.
- Rear IR receiver (located in the cable-entry compartment).
- Innovative water-tight Cable Entry System seals out moisture and allows for easy hook-ups.
- Optional water-tight media player/cable compartment accommodates a variety of media players including Brightsign®
- Weatherproof detachable 20W speaker module (optional), remote control, and control buttons.
- Side control button lock-out prevents unauthorized users from changing the programming.
- Includes warranty and manual
- Landscape Orientation Only (For Portrait installation, see DS-3214TSP)

SunBriteDS®

Outdoor Digital Signage

MODEL DS-3214TSL

SCREEN	<p>SCREEN 31.5-inch Diagonal Color Active Matrix TFT LED-LCD</p> <p>RESOLUTION 1920 x 1080 Full-HD 1080p</p> <p>ASPECT RATIO 16:9</p> <p>CONTRAST RATIO 1400:1</p>	<p>FRAME RATE 60 Hz</p> <p>VIEWING ANGLE 178° x 178°</p> <p>RESPONSE TIME 6.0 milliseconds</p> <p>TV FORMATS 1080p, 1080i, 720p, 720i, 480p, 480i</p>
CONNECTIONS	<p>RF Antenna/CATV (ATSC/QAM/NTSC) x1</p> <p>HDMI HDMI™ Input x2</p> <p>VIDEO COMPOSITE S-Video x1 and Composite Video x1, L/R Audio Inputs x1</p> <p>VIDEO COMPONENT YPbPr plus Stereo Audio x2</p> <p>PC 15-pin D-sub VGA plus Stereo Audio</p> <p>CONTROL SET RS232 Serial, Discrete IR Control, Concealed IR Window</p>	<p>AUDIO OUT Digital SPDIF Audio(fixed) Analog 1/8" headphone jack (variable)</p> <p>SPEAKERS 20 WATT detachable speaker module (optional)</p> <p>INPUT POWER 100-240 VAC, 50-60 Hz 2.0 A Max (0.5 A @ 120V)</p> <p>TOUCH INTERFACE USB TYPE B Connector. USB Cable not included.</p>
TEMPERATURE TOLERANCES	<p>OPERATING TEMP -40° to 122° F. (-40° to 50°C.)</p> <p>NON-OP. TEMP -40° to 140° F. (-40° to 60°C.)</p> <p>(OFF MODE WITH POWER APPLIED) The non-operating temperature feature requires power to be applied.</p>	
PHYSICAL SPECS	<p>ACCESSORIES INCLUDED Weatherproof remote control</p> <p>EXTERIOR Powder-coated aluminum.</p> <p>EXTERIOR COLORS Black, Silver</p> <p>TV DIMENSIONS 32.07"W x 20.02"H (22.12"H with optional speaker) x 6.29"D</p> <p>TV WEIGHT 41.0 lbs (45.0 lbs with optional speaker module)</p>	<p>SHIPPING DIMENSIONS 37.0"W x 32.0"H x 12.0"D</p> <p>SHIPPING WEIGHT 59.0 lbs</p> <p>RESIDENTIAL WARRANTY Two-year parts and labor.</p> <p>COMMERCIAL WARRANTY Two-year parts and labor.</p>