

Kramer Electronics, Ltd.



USER MANUAL

Model:

VS-24xl

Video-Audio Standby Switcher

Contents

1	Introduction	1
2	Getting Started	1
2.1	Quick Start	1
3	Overview	3
4	Your Video-Audio Standby Switcher	4
5	Connecting the Video-Audio Standby Switcher	5
5.1	Modes of Operation	5
5.1.1	Selecting the Automatic Mode	6
5.1.2	Selecting the Manual Mode	6
5.1.3	Connecting the Remote Connector	6
6	Technical Specifications	7

Figures

Figure 1:	VS-24xl Video-Audio Standby Switcher	4
Figure 2:	Connecting the VS-24xl Video-Audio Standby Switcher	5
Figure 3:	Remote Terminal Block Connector	6

Tables

Table 1:	VS-24xl Video-Audio Standby Switcher Features	4
Table 2:	Technical Specifications of the VS-24xl Video-Audio Standby Switcher	7

1 Introduction

Welcome to Kramer Electronics! Since 1981, Kramer Electronics has been providing a world of unique, creative, and affordable solutions to the vast range of problems that confront the video, audio, presentation, and broadcasting professional on a daily basis. In recent years, we have redesigned and upgraded most of our line, making the best even better! Our 1,000-plus different models now appear in 11 groups¹ that are clearly defined by function.

Congratulations on purchasing your Kramer **VS-24xl** *Video-Audio Standby Switcher*. This product is ideal for the following typical applications:

- Presentation systems requiring automatic selection via active wall plate inputs
- Security applications for automatic switching of control cameras
- Broadcast applications to eliminate dead air time
- Retail stores and other point-of-sale systems requiring uninterrupted demonstrations and advertising

The package includes the following items:

- **VS-24xl** Video-Audio Standby Switcher
- Power adapter (12V DC Input)
- This user manual²

2 Getting Started

We recommend that you:

- Unpack the equipment carefully and save the original box and packaging materials for possible future shipment
- Review the contents of this user manual
- Use Kramer high performance high resolution cables³

2.1 Quick Start


This quick start chart summarizes the basic setup and operation steps.

1 GROUP 1: Distribution Amplifiers; GROUP 2: Switchers and Matrix Switchers; GROUP 3: Control Systems; GROUP 4: Format/Standards Converters; GROUP 5: Twisted-Pair Solutions; GROUP 6: Specialty AV Products; GROUP 7: Scan Converters and Scalers; GROUP 8: Cables and Connectors; GROUP 9: Room Connectivity; GROUP 10: Accessories and Rack Adapters; GROUP 11: Sierra Products

2 Download up-to-date Kramer user manuals from the Internet at this URL: <http://www.kramerelectronics.com>

3 The complete list of Kramer cables is on our Web site at <http://www.kramerelectronics.com>

Step 1: Connect the inputs and output - see section 5

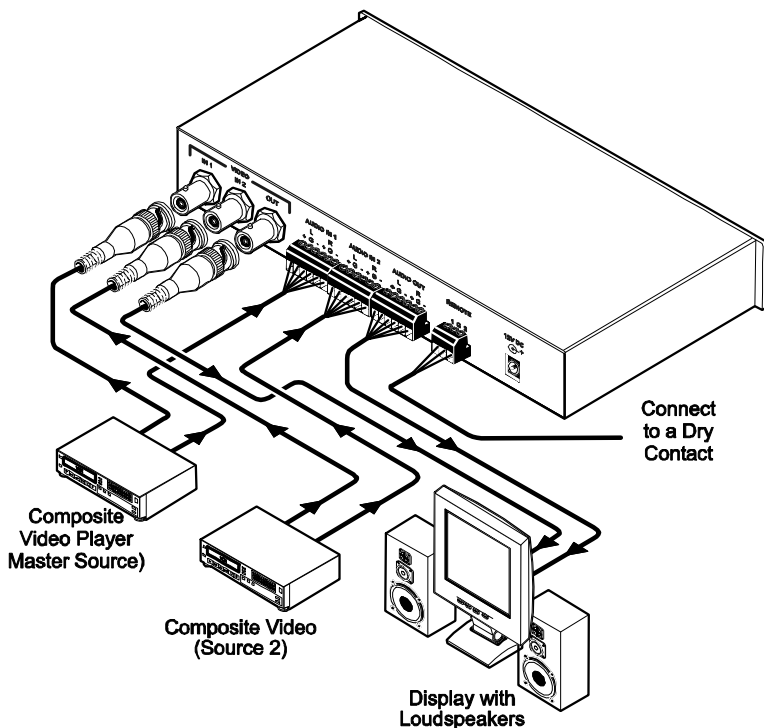


Step 2: Turn the power ON

Step 3: Operate the machine - see section 5

Use the SELECTOR buttons to select the input to switch to the output in the manual mode

Press to set to Auto mode, release to set to manual mode

If required, Adjust the EQ. and LEVEL

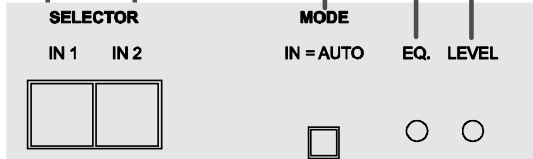

3 Overview

The **VS-24xl** is a 2x1 standby switcher for composite video and balanced stereo audio signals. The **VS-24xl** is designed to automatically switch to the second input whenever the primary video signal is interrupted. If the primary signal reappears, the **VS-24xl** will automatically switch back to input one.

In addition, the **VS-24xl**:

- Can operate as a simple 2x1 video and audio switcher using two front panel buttons or as a remote controlled video and audio 2x1 switcher
- Includes a front panel button allowing the user to select between automatic and manual switching
- Offers video LEVEL and cable EQ. control via trimmers accessible from the front panel

To achieve the best performance:

- Connect only good quality connection cables, thus avoiding interference, deterioration in signal quality due to poor matching, and elevated noise levels (often associated with low quality cables)
- Avoid interference from neighboring electrical appliances that may adversely influence signal quality and position your Kramer **VS-24xl** in a location free from moisture and away from excessive sunlight and dust



Caution – No operator-serviceable parts inside unit.

Warning – Use only the Kramer Electronics input power wall adapter that is provided with this unit¹.

Warning – Disconnect power and unplug unit from wall before installing or removing device or servicing unit.

¹ For example: model number AD2512C, part number 2535-000251

4 Your Video-Audio Standby Switcher

Figure 1 and Table 2 define the front and rear panels of the **VS-24xl**:

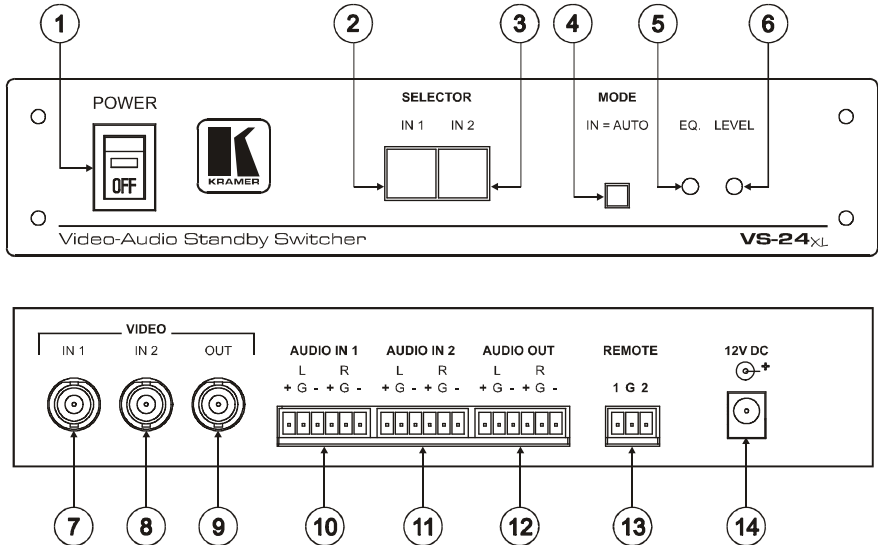


Figure 1: VS-24xl Video-Audio Standby Switcher

Table 1: VS-24xl Video-Audio Standby Switcher Features

#	Feature	Function
1	POWER Switch	Illuminated switch for turning the unit ON or OFF
2	SELECTOR IN 1 Button	In manual mode, press to switch input 1 to the output
3	SELECTOR IN 2 Button	In manual mode, press to switch input 2 to the output
4	MODE IN=AUTO Button	Push in to select automatic switching, release to select manual switching
5	EQ Trimmer	Adjust ¹ the cable compensation equalization level
6	LEVEL Trimmer	Adjust ¹ the output video signal level
7	VIDEO IN 1 (Master) BNC Connector	Connect to the primary video source 1
8	VIDEO IN 2 BNC Connector	Connect to the standby video source 2
9	VIDEO OUT BNC Connector	Connect to the video acceptor
10	AUDIO IN 1 (Master) Terminal Block Connector	Connect to the primary balanced audio input 1
11	AUDIO IN 2 Terminal Block Connector	Connect to the standby balanced audio input 2
12	AUDIO OUT Terminal Block Connector	Connect to the balanced audio output
13	REMOTE Terminal Block Connector	Connect to dry contact switches
14	12V DC	+12V DC connector for powering the unit

¹ Insert a screwdriver into the hole and carefully rotate it, to trim the level

5 Connecting the Video-Audio Standby Switcher

To connect the **VS-24xl**, as Figure 2 illustrates, connect the following¹ to the rear panel ports:

- Video inputs and video output cables
- Balanced audio inputs and balanced audio output cables
- Power adapter
- A dry contact switch (optional) to the remote connector (see section 5.1.3)

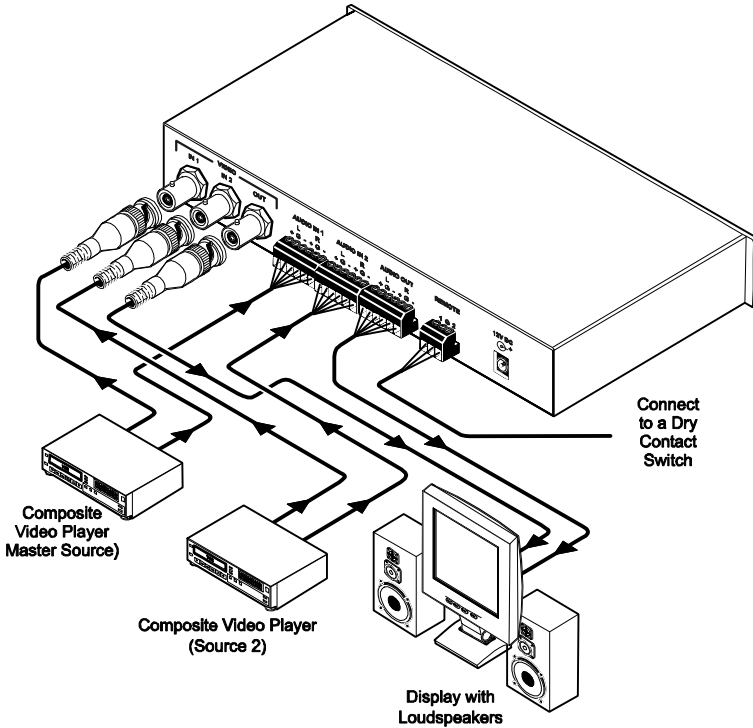


Figure 2: Connecting the VS-24xl Video-Audio Standby Switcher

5.1 Modes of Operation

Section 5.1.1 describes how to set the automatic mode, section 5.1.2 describes how to set the manual mode, and section 5.1.3 describes how to connect the remote connector.

¹ Switch OFF the power on each device before connecting it to your VS-24xl. After connecting your VS-24xl, switch on its power and then switch on the power on each device

5.1.1 Selecting the Automatic Mode

When the **VS-24xl** is set to the automatic mode, the signal from input 1 takes priority over the signal from input 2. If the signal from input 1 is interrupted, the signal from input 2 automatically routes to the output. In the automatic mode, pushing the SELECTOR buttons IN 1 and IN 2 has no effect.

To set the Automatic Mode

- Push in the MODE IN=AUTO button¹

5.1.2 Selecting the Manual Mode

In manual mode, you choose which input to route to the output.

To set the Manual Mode

1. Release the MODE IN=AUTO button¹.
2. Press one of the SELECTOR buttons:
 - SELECTOR IN 1 (to route the signal from input 1 to the output); **or**
 - SELECTOR IN 2 (to route the signal from input 2 to the output)

5.1.3 Connecting the Remote Connector

In addition to its automatic switching function, the **VS-24xl** can operate as a remote controlled video and audio 2x1 switcher, by connecting dry contact switches to the appropriate REMOTE input terminal block connector pins thus forcing the routing of one of the 2 inputs to the output by remote control.

To do so, connect the appropriate REMOTE input terminal block connector pins to a dry contact switch and release the MODE IN=AUTO button¹. For example, as Figure 3 illustrates, to route remote input 1 to the output, connect PIN 1 to the Ground. To route remote input 2 to the output, connect PIN 2 to the Ground. Do not connect both the remote input 1 and the remote input 2 to the Ground simultaneously.

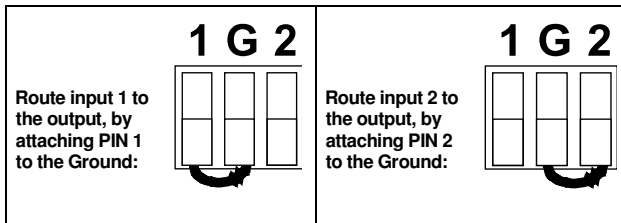


Figure 3: Remote Terminal Block Connector

¹ Item 4 in Table 1

When both input 1 and input 2 are connected, the (valid) signal from remote input 1 routes to the output. However, you can force the routing of remote input 2 to the output by attaching PIN 2 to the ground. If no input is present on remote input 2, you can even force the routing of the output from remote input 2 (displaying a blank screen) by attaching PIN 2 to the ground.

6 Technical Specifications

Table 2 includes the technical specifications:

Table 2: Technical Specifications¹ of the VS-24xl Video-Audio Standby Switcher

INPUTS:	2 composite video 1Vpp/75Ω on BNC connectors 2 balanced stereo audio +4dBm on detachable terminal block connectors	
OUTPUTS:	1 composite video 1Vpp/75Ω on a BNC connector 1 balanced stereo audio +4dBm on a detachable terminal block connector	
MAX. OUTPUT LEVEL:	Video: 2.1Vpp @100% colorbars	
BANDWIDTH (-3dB):	VIDEO: 430MHz; Max. flat response: 620MHz	AUDIO: > 65MHz (suitable for S/PDIF)
DIFF. GAIN:	0.03%	
DIFF. PHASE:	0.03 Deg.	
K-FACTOR:	<0.05%	
S/N RATIO:	VIDEO: 74dB	AUDIO: 71dB weighted
CROSSTALK (all hostile):	VIDEO: -56.3dB	AUDIO: -65.8dB @1kHz
CONTROLS:	LEVEL: -0.8dB to +6.4dB; EQUALIZATION: 0 to +12.8dB @50MHz	
AUDIO THD + NOISE:	0.019%	
AUDIO 2nd HARMONIC:	0.002%	
POWER SOURCE:	12V DC, 69mA	
DIMENSIONS:	22cm x 18cm x 4.5cm (8.7" x 7" x 1.7") W, D, H (half 19", 1U)	
WEIGHT:	1.2kg (2.65lbs) approx.	
ACCESSORIES:	12V power supply, RK-80	

¹ Specifications are subject to change without notice

LIMITED WARRANTY

Kramer Electronics (hereafter *Kramer*) warrants this product free from defects in material and workmanship under the following terms.

HOW LONG IS THE WARRANTY

Labor and parts are warranted for seven years from the date of the first customer purchase.

WHO IS PROTECTED?

Only the first purchase customer may enforce this warranty.

WHAT IS COVERED AND WHAT IS NOT COVERED

Except as below, this warranty covers all defects in material or workmanship in this product. The following are not covered by the warranty:

1. Any product which is not distributed by Kramer, or which is not purchased from an authorized Kramer dealer. If you are uncertain as to whether a dealer is authorized, please contact Kramer at one of the agents listed in the Web site www.kramerelectronics.com.
2. Any product, on which the serial number has been defaced, modified or removed, or on which the WARRANTY VOID IF TAMPERED sticker has been torn, reattached, removed or otherwise interfered with.
3. Damage, deterioration or malfunction resulting from:
 - i) Accident, misuse, abuse, neglect, fire, water, lightning or other acts of nature
 - ii) Product modification, or failure to follow instructions supplied with the product
 - iii) Repair or attempted repair by anyone not authorized by Kramer
 - iv) Any shipment of the product (claims must be presented to the carrier)
 - v) Removal or installation of the product
 - vi) Any other cause, which does not relate to a product defect
 - vii) Cartons, equipment enclosures, cables or accessories used in conjunction with the product

WHAT WE WILL PAY FOR AND WHAT WE WILL NOT PAY FOR

We will pay labor and material expenses for covered items. We will not pay for the following:

1. Removal or installations charges.
2. Costs of initial technical adjustments (set-up), including adjustment of user controls or programming. These costs are the responsibility of the Kramer dealer from whom the product was purchased.
3. Shipping charges.

HOW YOU CAN GET WARRANTY SERVICE

1. To obtain service on you product, you must take or ship it prepaid to any authorized Kramer service center.
2. Whenever warranty service is required, the original dated invoice (or a copy) must be presented as proof of warranty coverage, and should be included in any shipment of the product. Please also include in any mailing a contact name, company, address, and a description of the problem(s).
3. For the name of the nearest Kramer authorized service center, consult your authorized dealer.

LIMITATION OF IMPLIED WARRANTIES

All implied warranties, including warranties of merchantability and fitness for a particular purpose, are limited in duration to the length of this warranty.

EXCLUSION OF DAMAGES

The liability of Kramer for any effective products is limited to the repair or replacement of the product at our option. Kramer shall not be liable for:

1. Damage to other property caused by defects in this product, damages based upon inconvenience, loss of use of the product, loss of time, commercial loss; or:
2. Any other damages, whether incidental, consequential or otherwise. Some countries may not allow limitations on how long an implied warranty lasts and/or do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations and exclusions may not apply to you.

This warranty gives you specific legal rights, and you may also have other rights, which vary from place to place.

NOTE: All products returned to Kramer for service must have prior approval. This may be obtained from your dealer.

This equipment has been tested to determine compliance with the requirements of:

- EN-50081: "Electromagnetic compatibility (EMC); generic emission standard.
Part 1: Residential, commercial and light industry"
- EN-50082: "Electromagnetic compatibility (EMC) generic immunity standard.
Part 1: Residential, commercial and light industry environment".
- CFR-47: FCC Rules and Regulations:
Part 15: "Radio frequency devices
Subpart B Unintentional radiators"

CAUTION!

- Servicing the machines can only be done by an authorized Kramer technician. Any user who makes changes or modifications to the unit without the expressed approval of the manufacturer will void user authority to operate the equipment.
- Use the supplied DC power supply to feed power to the machine.
- Please use recommended interconnection cables to connect the machine to other components.



For the latest information on our products and a list of Kramer distributors, visit our Web site: www.kramerelectronics.com, where updates to this user manual may be found. We welcome your questions, comments and feedback.



Caution

Safety Warning:

Disconnect the unit from the power supply before opening/servicing.



Kramer Electronics, Ltd.

Web site: www.kramerelectronics.com

E-mail: info@kramerel.com

P/N: 2900-002068 REV 3