

BG-8K-DA12A

8K HDMI 1x2 Splitter

User Manual







TABLE OF CONTENTS

Statement	4
Safety Precaution	4
Introduction	5
Features	5
Packing List	5
Specifications	6
Operation Controls and Functions	7
Application Diagram	8
Tech Support	9
Warranty	10
Mission Statement	11
Copyright	12



Statement

Please read these instructions carefully before connecting, operating, or configuring this product. Please save this manual for future reference.

Safety Precaution

- To prevent damaging this product, avoid heavy pressure, strong vibration, or immersion during transportation, storage, and installation.
- The housing of this product is made of organic materials. Do not expose to any liquid, gas, or solids which may corrode the shell.
- Do not expose the product to rain or moisture.
- To prevent the risk of electric shock, do not open the case. Installation and maintenance should only be carried out by qualified technicians.
- Do not use the product beyond the specified temperature, humidity, or power supply specifications.
- This product does not contain parts that can be maintained or repaired by users. Damage caused by dismantling the product without authorization from BZBGear is not covered under the warranty policy.
- Installation and use of this product must strictly comply with local electrical safety standards.



Introduction

The BG-8K-DA12A is an 8K HDMI 1x2 splitter that can distribute 1 HDMI source to 2 connected display devices. It supports video resolutions up to 8K@60Hz 4:2:0. It also features advanced EDID management and audio de-embedding functionality (output through the optical and analog ports). This multi-functional splitter can be used for demonstration purposes, video conferencing, teaching, and other applications where a source may need to be duplicated to multiple screens.

Features

- HDMI 2.1 and HDCP 2.3 compliant
- 40Gbps video bandwidth
- Video resolutions up to 8K@60Hz 4:2:0 10bit, 8K@30Hz 4:4:4 10bit, 4K@120Hz 4:4:4 10bit
- VRR, FVA, ALLM supported
- HDR, HDR10, HDR10+, Dolby Vision, HLG pass through
- HDMI audio formats: LPCM, Dolby Digital/Plus/EX, Dolby True HD, DTS, DTS-EX, DTS-96/24, DTS High Res, DTS-HD Master Audio, DSD
- Built-in Equalizer, Retiming and Driver
- Advanced EDID management
- Audio de-embedding functionality (output through the optical and analog ports)
- Compact design for easy and flexible installation

Packing List

- 1x 8K HDMI 1x2 Splitter
- 1x 5V/2A Multinational Power Supply
- 1x User Manual



Specifications


Technical	
HDMI Compliance	HDMI 2.1
HDCP Compliance	HDCP 2.3
Video Bandwidth	40Gbps
Video Resolution	Up to 8K@60Hz 4:2:0 10bit, 8K@30Hz 4:4:4 10bit, 4K@120Hz 4:4:4 10bit
Color Depth	8/10/12-bit
Color Space	RGB, YCbCr 4:4:4 / 4:2:2. YUV 4:2:0
Audio Formats	HDMI input/output: LPCM, Dolby Digital/Plus/EX, Dolby True HD, DTS, DTS-EX, DTS-96/24, DTS High Res, DTS-HD Master Audio, DSD Audio de-embedding output: Optical: LPCM 2/5.1 CH, Dolby Digital 2/5.1 CH, DTS 2/5.1 CH Analog: PCM 2.0
ESD Protection	Human body model — ±8kV (Air-gap discharge) & ±4kV (Contact discharge)
Connection	
Input	1 × HDMI IN [Type A, 19-pin female]
Output	2 × HDMI OUT [Type A, 19-pin female] 1 × OPTICAL [S/PDIF] 1 × L/R [3.5mm Stereo Mini-jack]
Control	1 × SERVICE [Micro USB, Update port]
Mechanical	
Housing	Metal Enclosure
Silk Screen Color	Black
Dimensions	145mm (W) × 68mm (D) × 17mm (H)
Weight	258g
Power Supply	Input: AC100 - 240V 50/60Hz, Output: DC 5V/2A (US/EU standards, CE/FCC/UL certified)
Power Consumption	4.15W (Max)
Operation Temperature	0°C ~ 40°C / 32°F ~ 104°F
Storage Temperature	-20°C ~ 60°C / -4°F ~ 140°F
Relative Humidity	20~90% RH (non-condensing)

Recommended HDMI Cable				
Video Resolution	8K	4K60	4K24	1080P
HDMI Cable Type	Ultra HDMI 2.1	HDMI 2.0	HDMI 1.4	HDMI 1.4
HDMI Cable Length (HDMI IN/OUT)	3m/10ft	8m/26ft	12m/39ft	15m/49ft
The use of "Premium High Speed HDMI" cable is highly recommended.				




Operation Controls and Functions

Front Panel

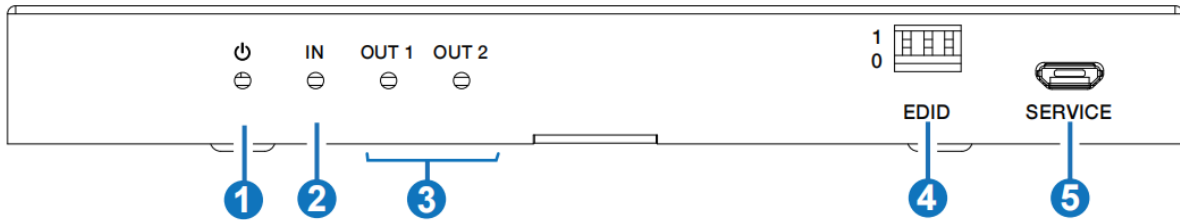


Rear Panel

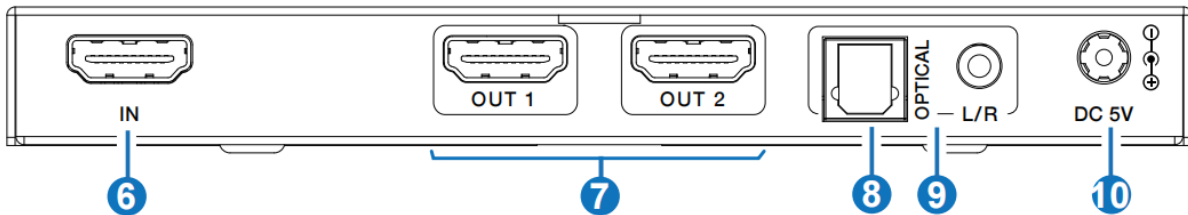

No.	Name	Function Description
1	POWER LED	The power LED light is green when the device is working.
2	IN LED	When the HDMI IN port connects an active source device the green LED will be on.
3	OUT LED (1~2)	When the HDMI OUT 1/2 ports connect to a display device and outputs a signal the corresponding green LED will be illuminated.
4	EDID DIP switch	Use the DIP switches to set EDID. 111- Copy OUT1 port sink EDID (factory default) 110- HDMI 1080p@60Hz, Audio 2ch PCM 101- HDMI 4K@60Hz 4:4:4, Audio 2ch PCM, HDR 100- HDMI 4K@60Hz 4:4:4, Audio 5.1ch PCM/DTS/DOLBY, HDR 011- HDMI 4K@60Hz 4:4:4, Audio 7.1ch PCM/DTS/DOLBY/HD, HDR 010- HDMI 8K@60Hz 4:2:0+8K@30Hz 4:4:4, 4K@120Hz 4:4:4, Audio 2ch PCM, HDR 001- HDMI 8K@60Hz 4:2:0+8K@30Hz 4:4:4, 4K@120Hz 4:4:4, Audio 5.1ch PCM/DTS/DOLBY, HDR 000- HDMI 8K@60Hz 4:2:0+8K@30Hz 4:4:4, 4K@120Hz 4:4:4, Audio 7.1ch PCM/DTS/DOLBY/HD, HDR
5	SERVICE	Firmware update and debug port.
6	IN port	Connect to an HDMI source device such as Bluray player or PS5 with an HDMI cable.
7	OUT port (1~2)	Connect to HDMI display devices such as TVs or Monitors with HDMI cables.
8	OPTICAL	Optical fiber audio output port.
9	L/R	Analog audio output port.
10	DC 5V	DC 5V2A Power input port.



Application Diagram

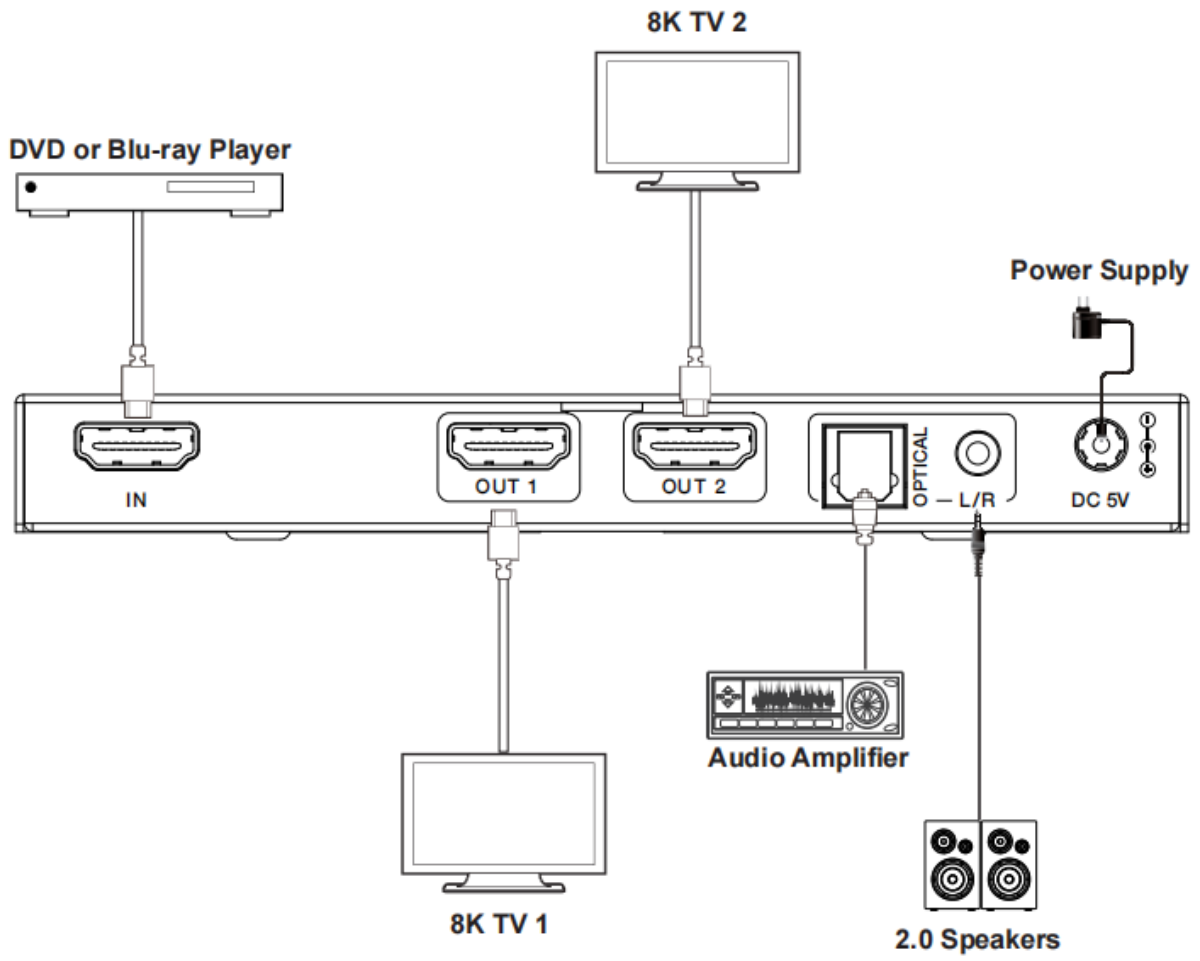



Tech Support

Have technical questions? We may have answered them already!

Please visit BZBGear's support page (bzbgear.com/support) for helpful information and tips regarding our products. Here you will find our Knowledge Base (bzbgear.com/knowledge-base) with detailed tutorials, quick start guides, and step-by-step troubleshooting instructions. Or explore our YouTube channel, BZB TV (youtube.com/c/BZBTVchannel), for help setting up, configuring, and other helpful how-to videos about our gear.

Need more in-depth support? Connect with one of our technical specialists directly:

Phone

1.888.499.9906

Email

support@bzbgear.com

Live Chat

bzbgear.com



Warranty

BZBGEAR Pro AV products and cameras come with a three-year warranty. An extended two-year warranty is available for our cameras upon registration for a total of five years.

For complete warranty information, please visit bzbgear.com/warranty.

For questions, please call 1.888.499.9906 or email support@bzbgear.com.



Mission Statement

BZBGear is a breakthrough manufacturer of high-quality, innovative audiovisual equipment ranging from AVoIP, professional broadcasting, conferencing, home theater, to live streaming solutions. We pride ourselves on unparalleled customer support and services. Our team offers system design consultation, and highly reviewed technical support for all the products in our catalog. BZBGear delivers quality products designed with users in mind.



Copyright

All the contents in this manual and its copyright are owned by BZBGear. No one is allowed to imitate, copy, or translate this manual without BZBGear's permission. This manual contains no guarantee, standpoint expression or other implies in any form. Product specification and information in this manual is for reference only and subject to change without notice.

All rights reserved. No reproducing is allowed without acknowledgement.