

6U/12 Slot Rack Mount for NetworkHD™ 100/200/400 Series

NHD-000-RACK4

Quickstart Guide

The NHD-000-RACK4 is a 6U rack mount that provides a clean installation for up to 12 NetworkHD™ 100, 200 and 400 Series encoders and decoders, NetworkHD Controller and Enado Mini.

Tip: WyreStorm recommends reading through this document in its entirety to become familiar with the product's features before beginning the installation process.

In the Box

- 1x NHD-000-RACK4 Chassis
- 2x 19" Rack Mounting Bracket
- 7x Blank Plate
- 1x Assembly Screws Pack

Dimensions and Weight

Dimensions and Weight	
Rack Units/Wall Box	6U
Height With Without Feet	265.9mm/10.47in 265.9mm/10.47in
Width With Without Brackets	483mm/19.02in 440mm/17.33in
Depth With Without Handles	188.3mm/7.42in 150mm/5.91in
Weight (Chassis without Plates)	2.3kg/5.06lbs


Installing Chassis in a Rack

1. Attach the rack ears to both sides of the chassis using the supplied screws.
2. Position and install the assembly into the rack and secure with rack screws (not supplied).

Tip: To keep the installed devices within operating temperature, do not position the NHD-000-RACK4 directly above heat generating devices such as amplifiers.

Installing Devices into the Chassis

1. Install the devices into the chassis using the supplied screws and mounting plates.
2. Install the supplied blank plates using the supplied screws to cover any open slots in the chassis.
3. If not installing in a rack, place the assembled chassis on a solid flat surface such as a cabinet or shelf located in a dry, well ventilated area.
4. Connect the devices per their specific documentation.

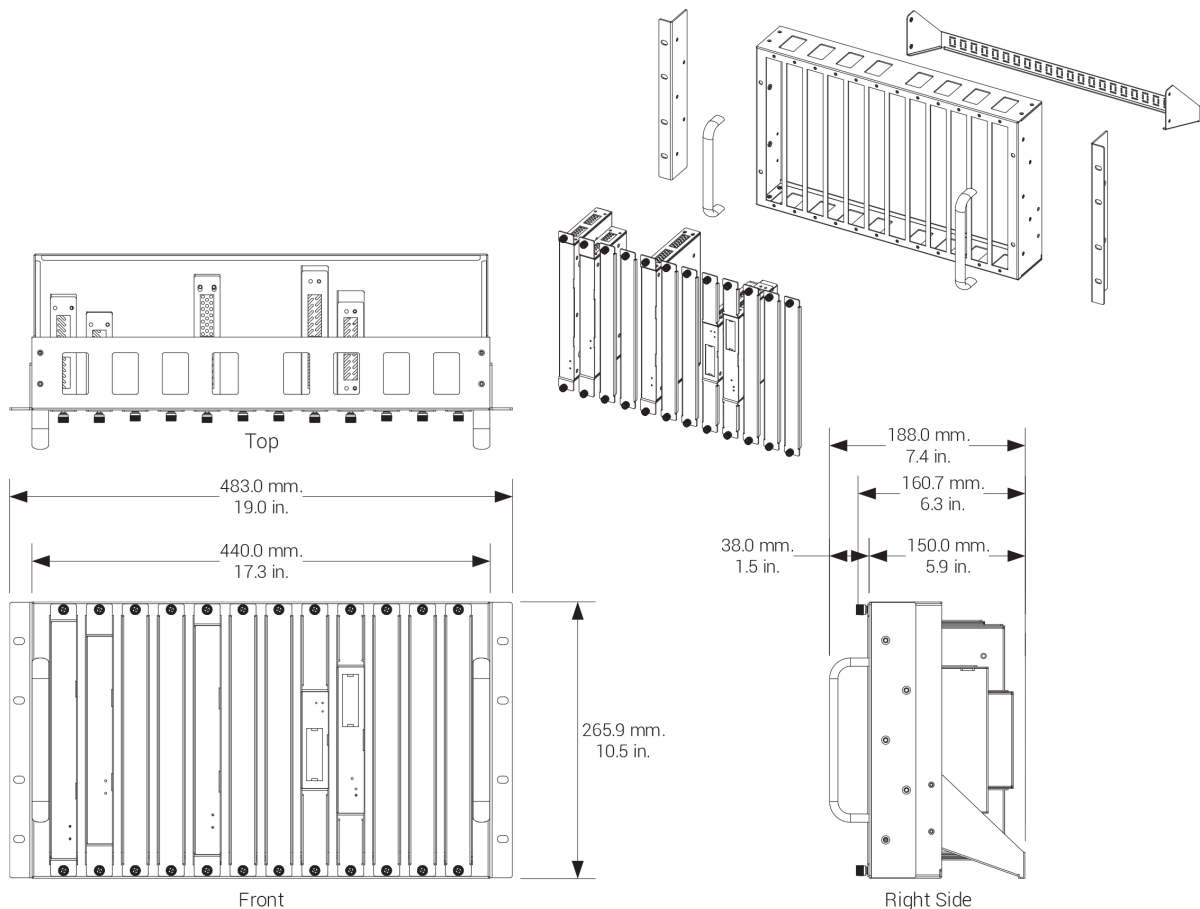

Note: WyreStorm reserves the right to change product specification, appearance or dimensions of this product at any time without prior notice.