

## Technical Specifications

<b>Video</b>	
Bandwidth	400 MHz
Analog signal level	1Volt
Impedance	75 ohms
Connector	High density HD15
Format	VGA/SVGA/XGA/UXGA/ RGBHV/RGSB
Sync	TTL horizontal SyncRange: 15 to 130
<b>Audio</b>	
Bandwidth	20KHz
Signal level	0dB
Impedance	10K ohms
Connector	3.5mm jack socket
Voltage	5VDC
Requirements	1000mA
Current Requirements	75ft
Maximum Output Range	
Signal Bandwidth	400 MHz
Enclosure	Black, metal
Dimensions (LxWxH)	7.38" x 3.56" x 1.56" (201.6mm x 90.5mm x 39.7mm)
Input Connectors	HD15 male
Output Connectors	4 HD15 female
Regulatory	CE, FCC

© Copyright 2009 Smart-AVI. All Rights Reserved

### Notice

The information contained in this document is subject to change without notice. Smart-AVI makes no warranty of any kind with regard to this material, including but not limited to, implied warranties of merchantability and fitness for any particular purpose.

Smart-AVI will not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance or use of this material.

No part of this document may be photocopied, reproduced or translated into another language without prior written consent from Smart-AVI.

# AVS4P



The AVI 4 port splitter allows you to use a single PC/MAC to display identical images on multiple monitors.

### Smart-AVI

2840 N. Naomi Ave.  
Burbank, California 91504  
Phone: (818) 565-0011  
Facsimile: (818) 565-0020

[www.smartavi.com](http://www.smartavi.com)

## Introduction

The AVS4P splitter allows you to use a single PC to display identical images on multiple monitors.

AVS Splitter is ideal for:

- Test bench facilities
- Data Center
- Help Desks


## Features

- Supports high resolution clear video up to 1900x1200.
- 400 MHz Bandwidth.
- Sends high-resolution VGA and Stereo Audio signals from one source too up to 4 monitors/speakers.
- Broadcast too up to 4 Audio/Video output devices through daisy chain capability.
- Each output reach up to 100ft.
- Compatible with VGA, XGA, Sun, MAC and SGI signals.
- Supports high-resolution clear video, up to 1900 x 1200.
- Sync Format/Polarity Preservation.
- Compatible with Line Level Stereo Audio signals.
- High ground loop immunity.
- Built-in lightning, power surge and transient protection.
- Remote units come with 2 buffered outputs.
- Designated trimmer in the remote unit to compensate for cable length.
- Metal case enclosure.

## Package Contents

- 1 AVS4P 4Port AVI splitter
- 1 User Manual
- 1 Power Adapter 5VDC 1A

## Installation Diagram

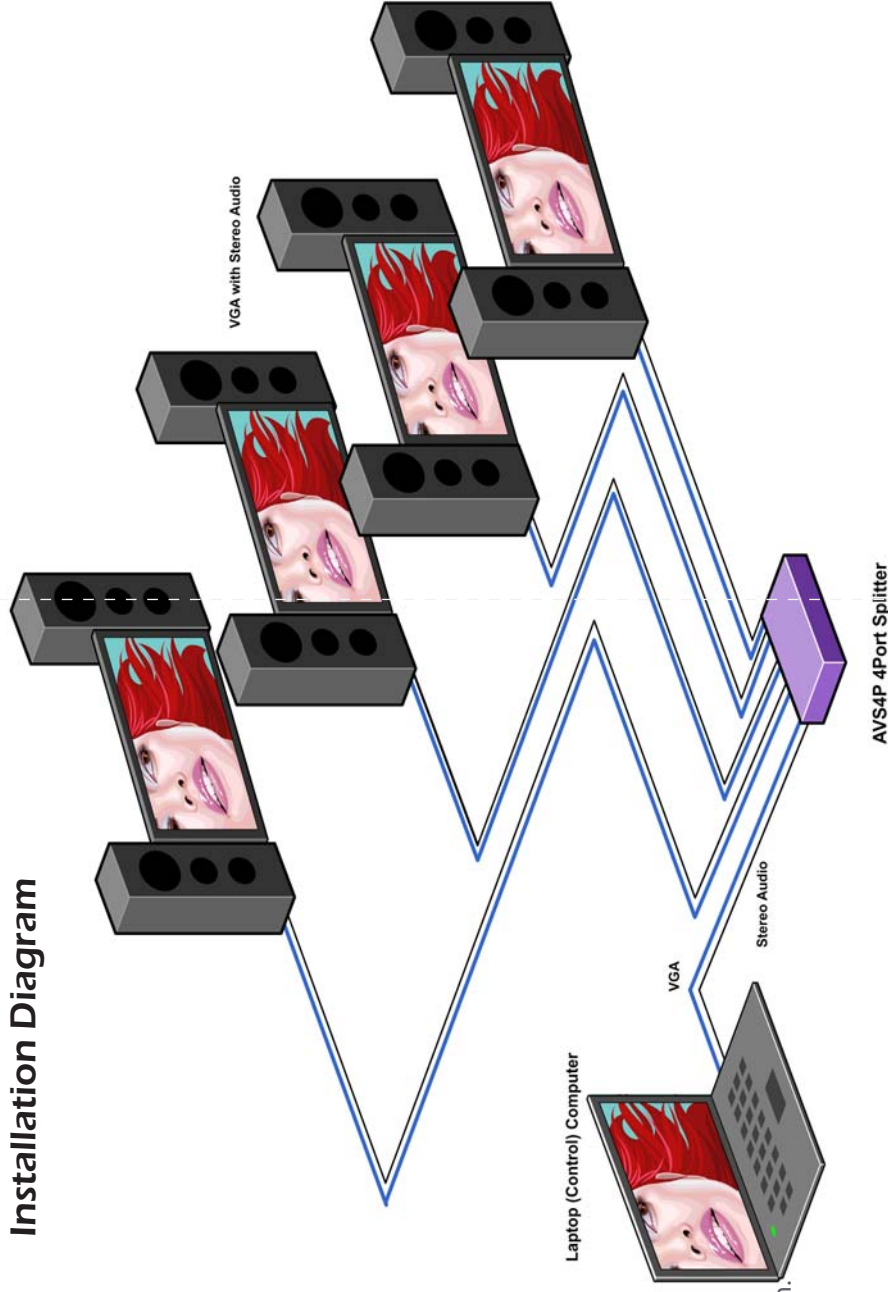

## Installation

1. Turn off the box
2. Connect the HD-15 video cable between the "video output" of PC and "video in" port of the video/audio splitter, use a male to female cable.
3. Connect the audio cable between the audio output device and the "audio in" port of video/audio splitter use a male to male cable.
4. Connect all monitors to the ports labeled out
5. Connect all the speakers to audio labeled out
6. Turn on the box