

HDMI 4 by 2 Switcher

AT-HD4-V42



User Manual

Table of Contents

1.	Introduction	-----	3
2.	Package Contents	-----	3
3.	Features	-----	3
4.	Specifications	-----	4
5.	Controls and Functions		
	a. Front	-----	4
	b. Back	-----	5
6.	Infrared Remote Control	-----	5
7.	RS-232 Protocols		
	a. Pin Definitions	-----	5
	b. Commands	-----	6
8.	Installations and Connection instructions		
	a. Wiring Diagram	-----	6
	b. Step by Step guide	-----	7
	c. RS-232 Hyperterminal set up	-----	8
	Safety Information	-----	9
	Warranty	-----	10
	Registration	-----	11

1. Introduction

The Atlona HDMI 4 by 2 Switcher is wonderful for watching media on multiple displays without the need to move devices. Great for home theatres with two mirrored video outputs, such as: flat panel display and video movie projector. The Atlona switcher supports two HDMI 100Mbps Ethernet ports for HDMI Ethernet Channel (HEC) and two Audio Return Channels, reducing the amount of wires necessary for compatible systems. This AT-HD4-V42 gives you high digital performance connection, between four sources and two video displays, without signal loss.

2. Package Content

- HDMI 4 by 2 switcher
- 5v DC power supply adaptor
- IR receiver module
- Remote control
- User Manual



3. Features


- Four HDMI inputs and two HDMI outputs
- Allows for two bi-directional HDMI Ethernet Channel pass through
- HDMI Audio Return Channel capable
- Supports HDCP
- Supports Deep colors up to 36-bit colors at 1080p 60Hz
- Supports Dolby TrueHD and DTS-HD Master Audio pass through ability when using an HDMI cable
- Digital audio de-embedding through the S/PDIF outputs

4. Specifications

Bandwidth Frequency	2.25Gbps (single link)
Input ports	4 HDMI (female type)
Output ports	2 HDMI (female type) 2 Ethernet port 2 S/PDIF port 1 IR 3.5m port
Resolution outputs	Video: 480i, 576i, 1080i 480p, 576p, 720p, 1080p 1080p24Hz Vesa: 640x480, 768x576, 800x600, 1024x768 1280x960, 1400x1050, 1600x1200
Dimensions	9.5x4.35x2(in) or 240x110x50(mm) - WxDxH
Weight	1.8 lbs or .81kg
Temperature	<u>Operating:</u> 32°F to 104°F or 0°C to 40°C <u>Storage:</u> -4°F to 140°F or -20°C to 60°C
Power Consumption	4.1W


5. Controls and Functions

Hardware component descriptions of the HDMI 4 by 2

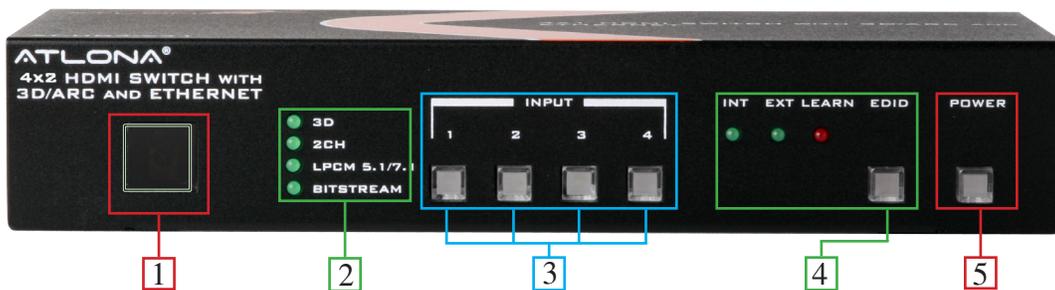

1. Infrared Sensor for the remote control
2. Green LED indicators which will light up when receiving a signal status
3. Blue LED input source buttons which will light up when selecting a source
4. Green LED Extended Display Identification Data (EDID) control which will light up when the option is chosen. When pressed longer than 3 seconds a red LED will light up to indicate that the EDID was copied.
5. Red LED will light up when the power is on.



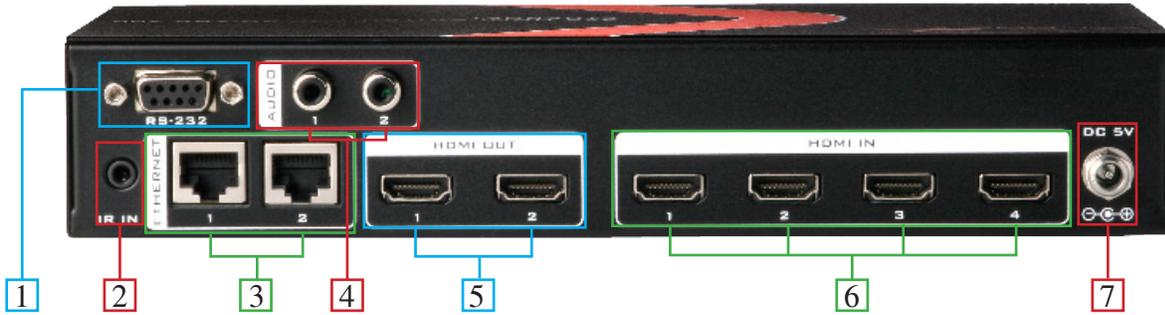

1. RS-232 serial port for PC or 3rd party control.
2. Infrared control in port for included infrared receiver module.
3. Ethernet ports for HDMI Ethernet Channel (HEC) capable devices.
4. Digital (S/PDIF) outputs for digital audio.
5. HDMI outputs to displays.
6. HDMI inputs for source components such as: DVD, PS3, Xbox360, or computer.
7. Power supply input.

6. Remote Control

- A. On and Off Button
- B. Source selection. Press the number that matches the source you wish to use



7. RS-232 Protocol Pin Definition

AT-HD4-V42			Remote Control Console	
PIN	Definition		Pin	Definition
1	NC		1	NC
2	Tx		2	Rx
3	Rx	↔	3	Tx
4	NC		4	NC
5	GND	↔	5	GND
6	NC		6	NC
7	NC		7	NC
8	NC		8	NC
9	NC		9	NC

Baud Rate: 9600bps
Stop bit: 1 bit

Data bit: 8bits
Flow Control: None

Parity:None

Command

Command	Action
Power 00	Power off (standby)
Power 01	Power on
Port 11	Output select input 1
Port 12	Output select input 2
Port 13	Output select input 3
Port 14	Output select input 4
Port 21	Output select input 1
Port 22	Output select input 2
Port 23	Output select input 3
Port 24	Output select input 4

8. Connections and Installation



Step by Step Guide

1. Place your switcher within 60 feet (18.29 meters) of your displays.

Note: If using the supplied IR remote control, remember you need to be within 23 feet (7 meters) and within a 60° angle of the infrared receiver.

2. Connect the HDMI cables to your sources and the switcher's inputs labeled HDMI IN.

Note: The Ethernet Channel will not pass to your devices if the HEC feature is not supported or you are not using the correct HDMI cables.

3. (Optional) Plug the supplied Infrared module into the IR IN port and place the receiver end somewhere that is within 23 feet (7 meters) of where you will be using remote.

Note: The supplied infrared module will allow you to control the Atlona AT-HD4-V42 when placed in a cabinet.

4. Plug the power cord into the DC 5V labeled port and then plug the other end into the wall.

5. (Optional) Plug the Ethernet cables into the Ethernet ports. If your devices and cables are HDMI Ethernet Channel compatible you will be able to pass the internet signal through the HDMI cables.

Note: Please verify that your devices are HDMI Ethernet Channel compatible, most ports will be labeled HEC for easy identification.

6. (Optional) Plug the Digital (S/PDIF) cable into the S/PDIF port. If you have an audio system this will allow for 2 channel and multi-channel support.

Note: If the Digital Audio is plugged in it will take first priority over the HDMI audio connection. Neither Dolby TrueHD or DTS-HD Master Audio will work with this option.

- a. (Optional) ARC Mode – The Audio Return Channel can be accessed through the switcher, by reselecting the source you currently have selected (all source lights will go off). The switcher will then pass through the audio from your video display to your A/V Receiver as an ARC signal (this will only work with ARC capable displays). Your video display will pass through audio from either its internal tuner or from any device plugged into it.

7. Connect the ends of the HDMI cables into the video displays and the other ends into the ports labeled HDMI OUT on the switcher.

8. Press the power button (on either the remote or the switcher)  to turn on the AT-HD4-V42.


9. (Optional) If using the RS-232 connection, plug the cable into the switcher, then your computer or third party control.

Note: You can purchase the RS-232 cable at: <http://www.atlona.com/>


- a. PC control will need a hyperterminal program. If you do not have one then you will need to download or purchase one and follow their instructions for the program's installation.

Set up for RS-232 hyperterminal


1. You will need to pull up your device manager.

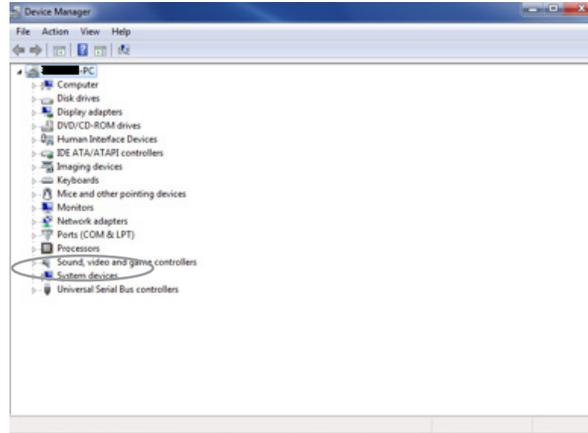

2. Right click on the Com Port that goes with your RS-232. Choose properties.

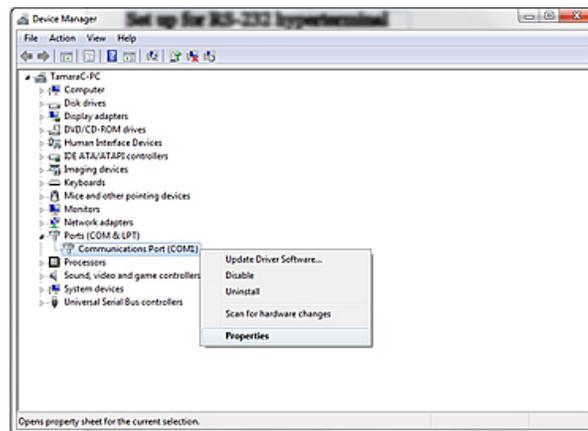

3. Update your port settings to the ones on the picture below.

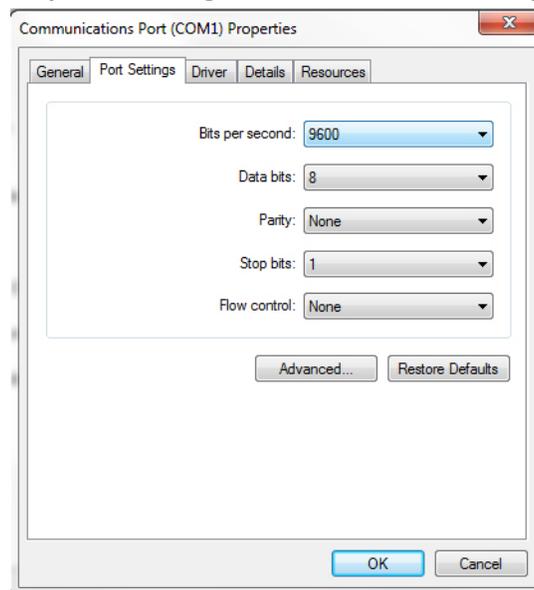

Your command codes should work in your hyperterminal now.

Safety Information

Safeguards



To reduce the risk of electric shock, do not expose this product to rain or moisture



If the wall plug does not fit into your local power socket, hire an electrician to replace your obsolete socket.



Do not modify the wall plug. Doing so will void the warranty and safety features.



This equipment should be installed near the socket outlet and the device should be easily accessible in the case it requires disconnection.

Precautions

FCC regulations state that any unauthorized changes or modifications to this equipment, not expressly approved by the manufacturer, could void the user's authority to operate this equipment.

Operate this product using only the included external power supply. Use of other power supplies could impair performance, damage the product, or cause fires.

In the event of an electrostatic discharge this device may automatically turn off. If this occurs, unplug the device and plug it back in.

Protect and route power cords so they will not be stepped on or pinched by anything placed on or against them. Be especially careful of plug-ins or cord exit points from this product.

Avoid excessive humidity, sudden temperature changes or temperature extremes.

Keep this product away from wet locations such as bathtubs, sinks, laundries, wet basements, fish tanks, and swimming pools.

Use only accessories recommended by Atlona to avoid fire, shock, or other hazards.

Unplug the product before cleaning. Use a damp cloth for cleaning and **not** cleaning fluid or aerosols. Such products could enter the unit and cause damage, fire, or electric shock. Some substances may also mar the finish of the product.

Never open, remove unit panels, or make any adjustments not described in this manual. Attempting to do so could expose you to dangerous electrical shock or other hazards. It may also cause damage to your AT-HD4-V42. Opening the product will void the warranty.

Do not attempt to service the unit. Disconnect the product and contact your authorized Atlona reseller or contact Atlona directly.

Warranty

Limited Warranty

Atlona Technologies warrants that (a) its products (the AT-HD4-V42) will perform substantially in accordance with the accompanying written materials for a period of 3 years from the date of receipt and (b) that the product will be free from defects in materials and workmanship under normal use and service for a period of 3 years. In the event applicable law imposes any implied warranties, the implied warranty period is limited to 3 years from the date of receipt. Some jurisdictions do not allow such limitations on duration of an implied warranty, so the above limitation may not apply to customers that fall within those areas.

Customer Remedies

Atlona Technologies' and its suppliers' entire liability and Customer's exclusive remedy shall be, at Atlona Technologies' decision, either return of the price paid for the product, repair, or replacement of the product that does not meet this Limited Warranty and which is returned to Atlona Technologies with a copy of the Customer's receipt. This Limited Warranty is void if failure of the product has resulted from accident, abuse, or misapplication. Any replacement product will be warranted for the remainder of the original warranty period.

No other warranties

To the maximum extent permitted by applicable law, Atlona Technologies and its suppliers disclaim all other warranties, either expressed or implied, including, but not limited to, implied warranties of merchantability and fitness for a particular purpose, with regard to the product and any related written materials. This Limited Warranty gives customer specific legal rights. Customers may have other rights depending on the jurisdiction.

No liability for damages

To the maximum extent permitted by applicable law, in no event shall Atlona Technologies or its suppliers be liable for any damages arising out of the use of or inability to use this product, even if Atlona Technologies has been advised of the possibility of such damages. Such damages include but are not limited to: special, incidental, consequential, or indirect damages for personal injury, loss of business profits, business interruption, loss of business information, or any other pecuniary loss. Atlona Technologies' and its suppliers' entire liability under any provision of this agreement shall be limited to the amount actually paid by you for the product. Some Jurisdictions do not allow the exclusion or limitation of liability for consequential or incidental damage. The above limitations may not apply to you in such jurisdictional cases.

Atlona Product Registration

Thank you for purchasing this Atlona product. - We hope you enjoy it and will take an extra few moments to register your new purchase.

Registration creates an ownership record if your product is lost or stolen and helps ensure you'll receive notification of performance issues and firmware updates.

At Atlona, we respect and protect your privacy, assuring you that your registration information is completely secure. Atlona product registration is completely voluntary and failure to register will not diminish your limited warranty rights.

To register go to: <http://www.atlona.com/registration>