




SMi Series

Install Instructions For:
SM400i - UL listed 1480

1.435.647.9555 | 800.647.TUBE | www.soundtube.com

Box contents

- 1 Speaker
- 1 Terminal weather boot
- 1 Theft resistant u-bracket
- 1 Safety cable
- 1 Safety cable anchor screw
- 1 Euroblock connector
- 1 Grille-mounted tap switch cover
- 1 Allen wrench
- 2 Port plugs

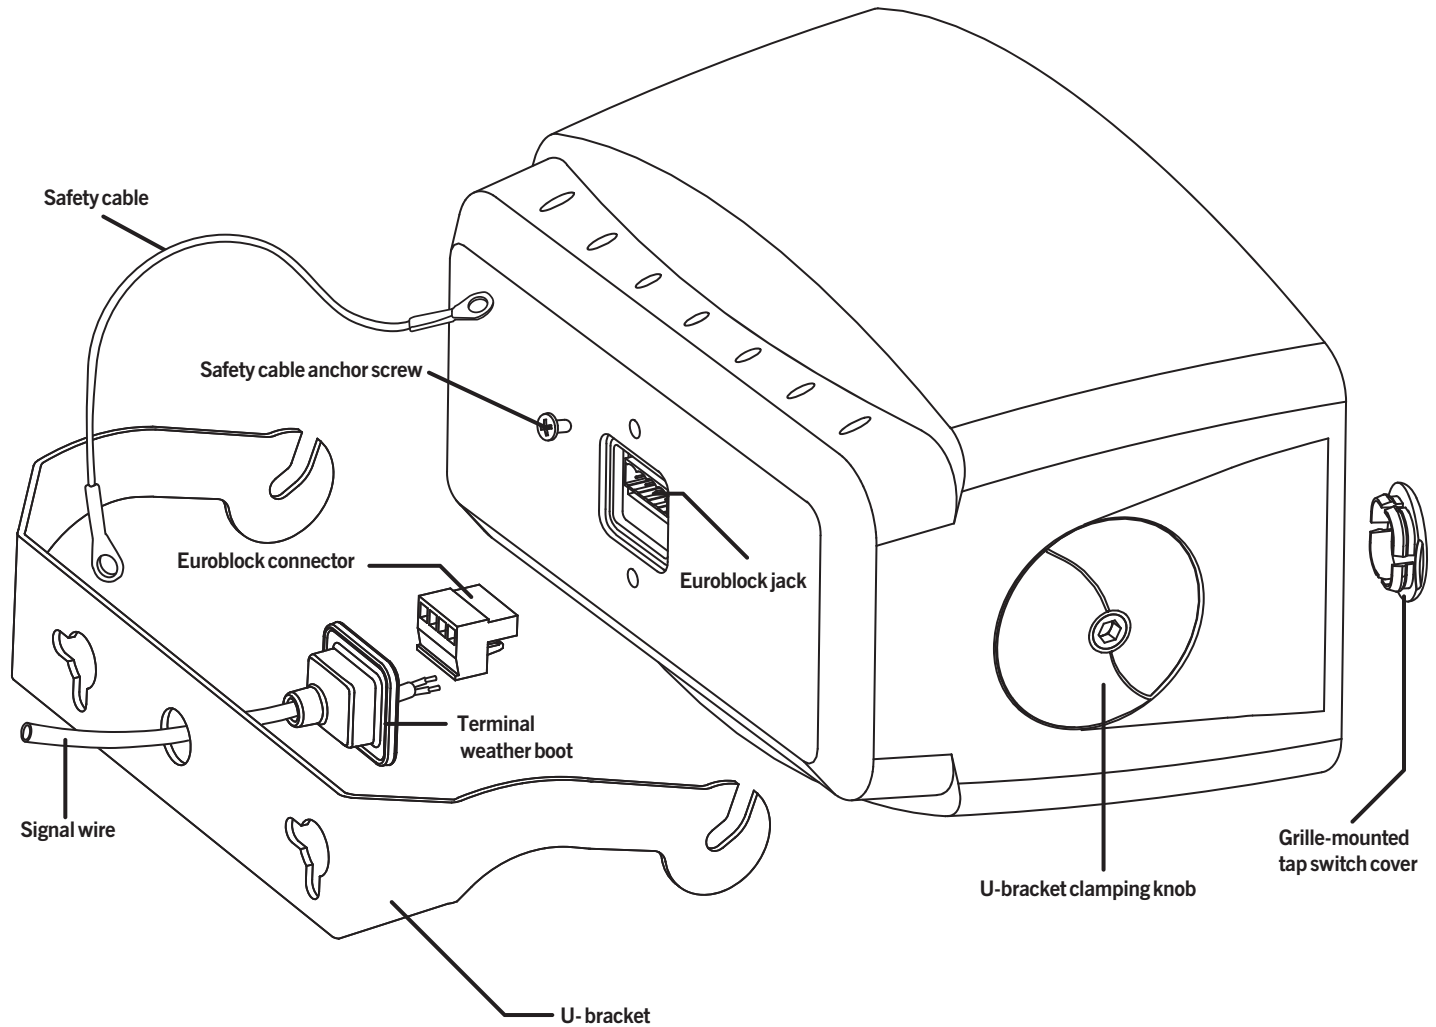

© 2008 SoundTube Entertainment, Inc. All rights reserved. PN INS-SM400i Rev05.28.08




Warning

SoundTube speakers must be installed by a professional audio installer/contractor. For safety and for optimum audio performance, installer must follow all directions issued by SoundTube Entertainment.




Warning


Do not spec or install speaker near support beam, ventilation duct or other structure that may interfere with speaker function or dispersion.




1. Unpack speaker and mounting hardware.




2. Choose a secure mounting surface with sufficient strength to reliably hold the speaker.




3. Mount u-bracket with clamping slots pointing upward. Securely fasten mounting bracket and safety cable to surface (user must supply fasteners).




4. Slip terminal weather boot over signal wire. For environmental applications, put RTV silicone around nipple and base when installation is complete.




5. Connect signal wire to 4-pin Euroblock plug. Tighten unused terminal screws. Use inside positive and negative inputs for either voice coil or distributed systems. For daisy chaining, use outside positive and negative terminals.




6. Use provided allen wrench to loosen knobs on sides of speaker. Tilt speaker 45° (grille up) and slide on to bracket.




8. Insert 4-pin Euroblock plug into Euroblock jack on rear of speaker. Connectors are keyed for polarity. Insert terminal weather boot.



9. Connect safety cable to rear of speaker.




10. Aim speaker and tighten knobs.



11. Select the tap position by removing the rubber plug on grille to access rotary switch. The switch is preset to the maximum tap setting in 70.7 V mode (20W). Select desired setting and reinsert rubber plug. Done!

Port protection for SM400i



To enhance protection of internal components from humidity and other potentially corrosive elements, use provided port plugs to seal enclosure. Use RTV silicone around edge of the port plug for increased protection.