

BZ-MXM-3232M

36X36 Modular Matrix Routing Switch with Scaler

Product Brief

BZ-MXM-3232M is a multi-format HDMI Matrix Switcher with 32 input port to receive sources signals and 32 output port to transmit to display device. The product along with standard 8U structure design and dual power input Adopts the back plug-in structure ,each card supports two input or output signals, each channel's resolution up to 4K@60Hz. There is a OLD on the front panel to show status of channel when do switching. It can be controlled by front panel button, RS-232, TCP/IP. This product is great for conference rooms, auditoriums, training rooms, monitoring rooms, Command Centers, and more.

• Product picture

Front panel:



Real Panel:



Whole machine drawing:



Input and output card diagrams:

DVI-U input、output card



HDBT input, output card



SDI input, output card



VGAinput, output card





Feature


- > Seamless multi-format matrix, no black screen, card screen, jitter, tear phenomenon in the switching process;
- > Support transformation function of input signal and resolution-control by software;
- > OSD character overlay function, font, color, size can be adjusted;
- ➤ HDBT board supports resolution up to 1080P with 100M extension, HDBT output SCALER only supports resolution of 1080P;
- The output card can be configured to Stitching screen mode in 1X2, 2X2, 2X3 or 2x4 spliced screen mode;
- Support input/output with audio , and Audio embedding and de-embedding;
- ➤ HDMI/DVI EDID is configurable;
- > Support power-down memory function;
- ➤ Supports on-panel button, RS-232, TCP/IP control;
- > Dual power supply , Design of standard 8U chassis;

Parameter

Parameter							
Input	Interface type	HDBaseT , HDMI/DVI , 3G/HD/SD-SDI , VGA , YPbPr , CVBS					
	Signal and Interface Standards	HDMI 2.0	HDMI port	HDMI 2.0, Reso up to 4K@60Hz 4 : 4 : 4			
		HDMI1.3	HDMI port	HDMI V1.3A,Reso up to1080P@60			
		HDMI	DVI-U port	HDMI V1.3A,Reso up to1080P@60			
		DVI	DVI-U port	DVI 1.0,Reso up to1920x1080			
		VGA	DVI-U port	Reso up to 1920x1080			
		YPbPr	DVI-U port	Reso up to 1080p60			
		CVBS	DVI-U port	PAL , NTSC			
		SDI	BNC port	Reso up to 1080p60			
		VGA	VGA-DB15	Reso up to 1920x1080			
		HDbaseT	RJ45 port	Reso up to1920x1080			
output	Interface type	HDbaseT , HDMI/DVI , 3G/HD/SD-SDI , VGA , YPbPr , CVBS etc					
	Signal and	HDMI 2.0	HDMI port	HDMI 2.0 , Reso up to 4K@60 , 4 : 4 : 4			
	Connection	HDMI1.3	HDMI port	HDMI V1.3A , Reso up to 1920x1080			

	Standards	HDMI	DVI-U port	HDMI V1.3A , Reso up to 1920x1080		
		DVI	DVI-U port	DVI 1.0,Reso up to 1920x1080		
		VGA	DVI-U port	Reso up to 1920x1080		
		YPbPr	DVI-U port	Reso up to 1080p60		
		CVBS	DVI-U port	PAL/NTSC		
		SDI	BNC port	Reso up to 1080p60		
ı		VGA	VGA-DB15	Reso up to 1920x1080		
		HDbaseT	RJ45 port	Reso up to 1920x1080		
Control		RS-232	D-sub 9	Buad rate : 9600		
	Serial control	direct				
		connection				
		type				
	Network	Fixed IP address				
	control					
	ESD Protect	±8kV (Air-gap discharge) , ±4kV (Contact discharge)				
Power	AC	AC110 ~ 240VAC , 50/60Hz				
	Power	60W—160W				
	consumption					
Temp	Operating	32 - 104°F / 0 - 40°C				
	temp					
	Storage	-4 - 140°F / -20 - 60°C				
	Temp	-4 - 140 F / -20 - 00 C				
Humidity	Humidity	20 - 90% RH (no-condensation)				
Housing	Housing	Metal				
Color	Color	Silver gray				
Size	W*D*H	483 (mm) ×365 (mm) ×360 (mm)				

Connection Diagram

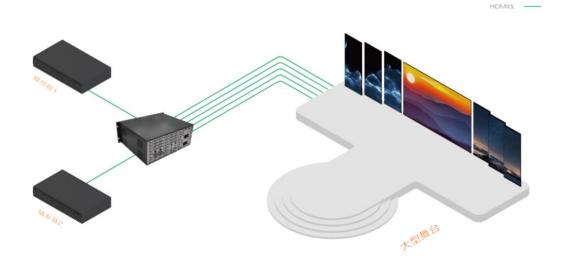

Application

1 Multimedia Conference Hall

2. Television Teaching

3. The large screen projection

Mission Statement

BZB Gear manifests from the competitive nature of the audiovisual industry to innovate while

keeping the customer in mind. AV solutions can cost a pretty penny, and new technology only

adds to it. We believe everyone deserves to see, hear, and feel the advancements made in today's

AV world without having to break the bank. BZB Gear is the solution for small to medium-sized

applications requiring the latest professional products in AV.

We live in a DIY era where resources are abundant on the internet. With that in mind, our team

offers system design consultation and expert tech support seven days a week for the products in

our BZB Gear catalog. You'll notice comparably lower prices with BZB Gear solutions, but the

quality of the products is on par with the top brands in the industry. The unparalleled support from

our team is our way of showing we care for every one of our customers. Whether you're an

integrator, home theater enthusiast, or a do-it-yourselfer, BZB Gear offers the solutions to allow

you to focus on your project and not your budget.

Warranty Information

BZB Gear | Second Year Assurance

BZB Gear wants to assure you peace of mind. We're so confident in the quality of our products

that along with the manufacturer's one-year limited warranty, we are offering free second-year

warranty coverage upon registration*!

Taking advantage of this program is simple, just follow the steps below:

- 1. Register your product within 90 days of purchase by visiting BZBGear.com/warranty.
- 2. Complete the registration form. Provide all necessary proof of purchase details, including serial number and a copy of your sales receipt.

For questions, please call 1.888.660.2962 or email support@bzbgear.com.

For complete warranty information, please visit BZBGear.com/warranty or scan the QR code below.



*Terms and conditions apply. Registration is required.